

Jubilee Standard (WD-JUB)

The Original Worm Drive Hose Clamp



Description

Original Range Jubilee® Clips in zinc protected mild steel are the most popular clips in our range. Ideally suited for most day to day requirements for joining hose in areas such as the automotive industry and the automotive aftermarket, agricultural applications, such as irrigation and farm machinery, pneumatic and hydraulic applications in the industrial sector, hardware/DIY applications and in construction.

Jubilee® hose clips in 304 (18/8) stainless steel are widely used across all industries where hose clips are used to secure hoses, as well as for other applications. Their corrosion resistance enables their use in the marine, oil and gas and food sectors, as well as the agricultural, hardware and industrial sectors, where higher corrosion resistance is required.

Jubilee® hose clips with the highest corrosion resistance, our 316 (18/10) stainless steel Jubilee® clips, are the hose clip of preference in shipbuilding and maintenance when the highest level of corrosion resistance is demanded. Other areas where our Original Range 316 stainless steel clips are used are the food and chemicals industries, this material grade is also favored by the oil and gas industry.

Jubilee Wingspade (WSWD)


Worm Drive Hose Clamp with Wing Screw
for Manual Fitting



Part Number HCL*	Minimum Diameter (A)		Max Diameter (A)		Band Width (B)		Band Thickness (C)		Recommended Torque Nm	Maximum Torque Nm	Maximum Pressure PSi	Part Number Jubilee**
	mm	inch	mm	inch	mm	inch	mm	inch				
WD-JUB-000	9.5	0.374	12.0	0.472	9.9	0.39	0.76	0.030	3.4	4.5	203	000MS
WD-JUB-M00	11.0	0.433	16.0	0.630								M00MS
WD-JUB-00	13.0	0.512	20.0	0.787								00MS
WD-JUB-0	16.0	0.630	22.0	0.866								0MS
WD-JUB-0X	18.0	0.709	25.0	0.984								0XMS
WD-JUB-1A	22.0	0.866	30.0	1.181					5.1	6.8	102	1AMS
WD-JUB-1	25.0	0.984	35.0	1.378								1MS
WD-JUB-1X	30.0	1.181	40.0	1.575								1XMS
WD-JUB-1M	32.0	1.260	45.0	1.772								1MMS
WD-JUB-2A	35.0	1.378	50.0	1.969								2AMS
WD-JUB-2	40.0	1.575	55.0	2.165	5.9	7.9	102	2MS				
WD-JUB-2X	45.0	1.772	60.0	2.362				2XMS				
WD-JUB-3	55.0	2.165	70.0	2.756				3MS				
WD-JUB-3X	60.0	2.362	80.0	3.150				3XMS				
WD-JUB-4	70.0	2.756	90.0	3.543				6.7	9	44	4MS	
WD-JUB-4X	85.0	3.346	100.0	3.937	4XMS							
WD-JUB-5	90.0	3.543	120.0	4.724	5MS							
WD-JUB-6	110.0	4.331	140.0	5.512	6MS							
WD-JUB-6X	120.0	4.724	150.0	5.906	6XMS							
WD-JUB-7	135.0	5.315	165.0	6.496	5.9	7.9	18	7MS				
WD-JUB-7.5	158.0	6.220	190.0	7.480				7.5MS				
WD-JUB-8.5	184.0	7.244	216.0	8.504				8.5MS				
WD-JUB-9.5	210.0	8.268	242.0	9.528				9.5MS				
WD-JUB-10.5	235.0	9.252	267.0	10.512				10.5MS				
WD-JUB-11.5	260.0	10.236	292.0	11.496	5.9	7.9	18	11.5MS				
WD-JUB-12.5	286.0	11.260	318.0	12.520				12.5MS				

* To identify 304 or 316SS parts add either W4 or W5 to the end of the HCL part numbers

** To identify different materials adjust the Jubilee part number as follows - MS (W1), SS (W4) & SS316 (W5)

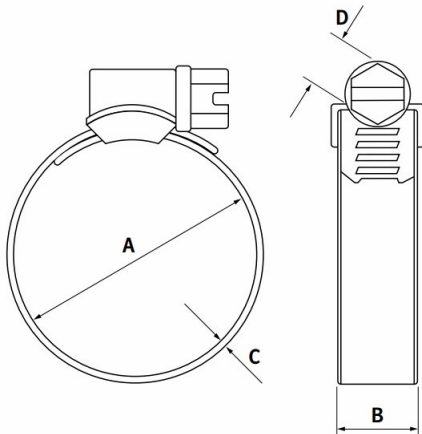

Product Information

Made by: L Robinson Ltd

Manufactured according to: British Standard

RoHS Compliant: Yes

Hazardous Goods: No

HS Tariff Code: 7326 90 92

Material Information

	W1	W4	W5
Band & Housing:	Mild Zinc Plated Steel	304 Stainless Steel	316 Stainless Steel
Screw:			
Corrosion Resistance	240 Hours NSS test	2000 Hours NSS Test	

